


LP 3Ton Series With CWB7 Indicator

SANS 1649 compliant - For Trade-use

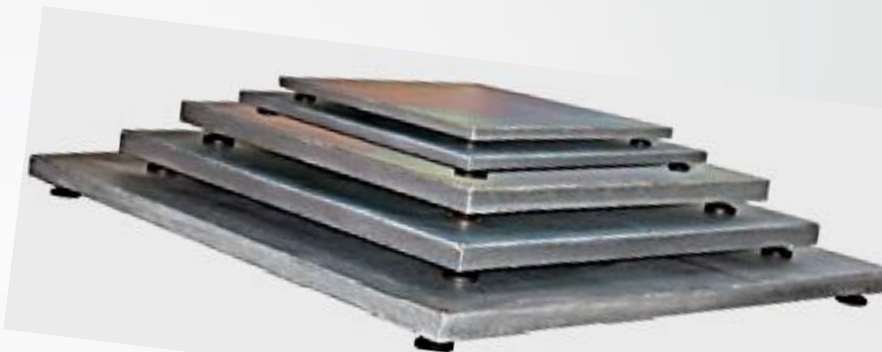

Specifications:

Indicator

- Display/Internal Resolution: 30,000/600,000
- Sample Rate: 30 times per second
- Weighing Units: kg and lb
- Operating Temperature: 0°C to 40°C
- Display: Extra-large 40mm high, 6 digits LCD (Seven Segments) with LED backlight
- Known manual tare entry
- Function keys: Tare x 2, Units, Net/Gross, Print, Zero, On, Off
- Interface RS232 output for printer or PC

4mm Top Plate			
Model	Capacity	Accuracy	Dimensions
LP0808	600/1500/3000kg	0,2/0,5/1kg	80cm x 80cm
LP1010	600/1500/3000kg	0,2/0,5/1kg	1m x 1m
LP1212	600/1500/3000kg	0,2/0,5/1kg	1,2m x 1,2m
LP1515	600/1500/3000kg	0,2/0,5/1kg	1,5m x 1,5m
5mm Top Plate			
LP1520	600/1500/3000kg	0,2/0,5/1kg	1,5m x 2m
LP2020	600/1500/3000kg	0,2/0,5/1kg	2m x 2m

Specifications:

Platform

- **FIXED or DETACHABLE TOP**
- **Sandblasted & Powder coated**
- **5m Loadcell cable**
- **4 x Leveling feet**
- **Top adjustable for summation board**
- **Loadcells: 4 x ZEMIC H8C-1ton or 2ton**
- **Height = Adjustable 110mm - 120mm**
- **Construction: 76x38 channel**
- **4mm Smooth top plate**